


E18HT



KF

MONTRES KF

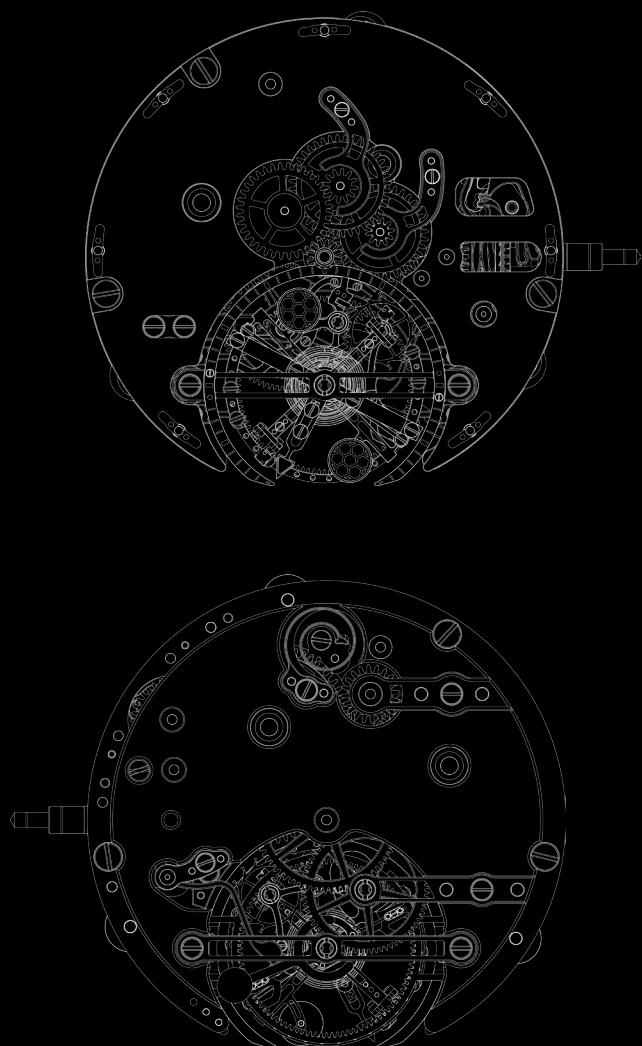

Novamag® Calibre 01

Case diameter

44.5 mm

Case thickness

12.2 mm

Movement diameter

37.7 mm

Movement thickness

7.4 mm

One-minute tourbillon with balance-stop and crown-based shock-absorbing system

Manuel winding movement built on pillars, 42 jewels

Spirograph® balance adjustment by inertia and thermocompensation

Index-free balance-spring with Grossman internal curve and Phillips external curve

Reinforced anti-magnetism, ISO 764-2020

Twin barrel ensuring an 84-hour power reserve reduced to 66 hours by means of a «Maltese cross» stopwork mechanism

Frequency 18,000 vph

Water resistance to 50 metres (5 ATM)

Escape-wheel and pallet-staff with Incifix® cap jewels

Made in La Chaux-de-Fonds

To contact us :

Montres KF
Allée du Quartz 5
2300 La Chaux-de-Fonds
NE, Suisse

+41 32 924 98 12
info@montres-kf.com
www.montres-kf.com